




JIS標示




配對組合/U45, U55, U105



表示方法

上圖壓力錶為選擇部品

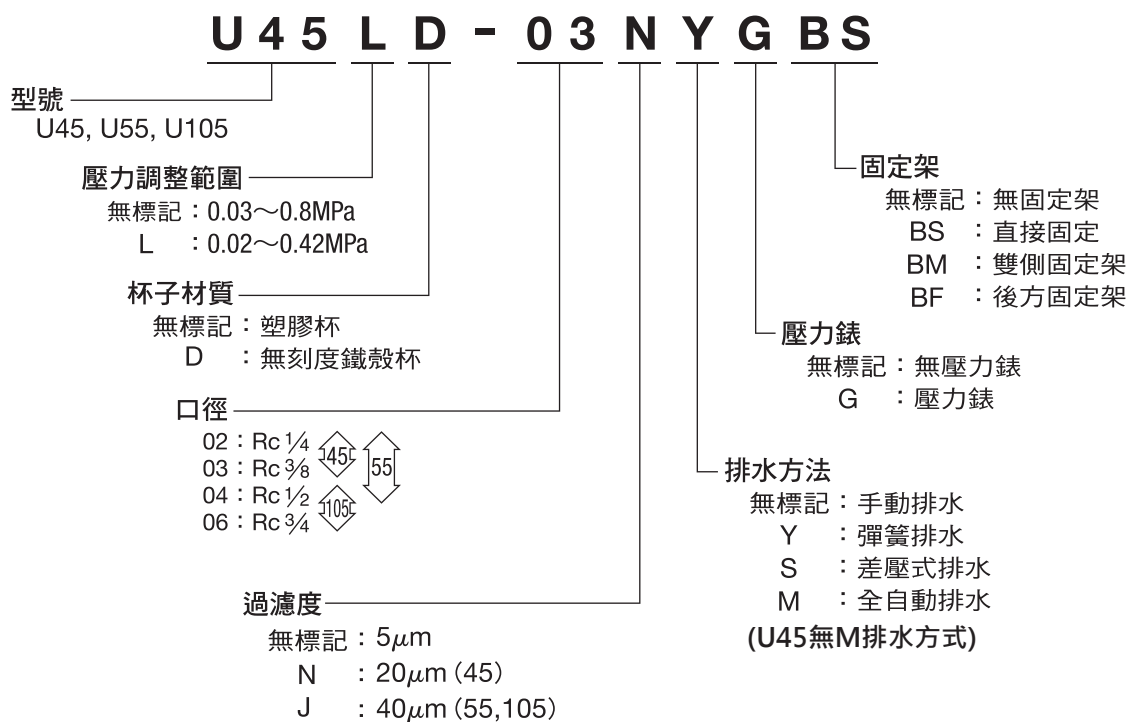

規格

型號	單 位	U45	U55	U105
口徑		Rc¼	Rc¼、⅜、½	Rc½、¾
壓力錶連接之口徑		Rc⅝		
過濾度	μm	5 (N：20)	5 (J：40)	
壓力調整範圍	MPa[kgf/cm²]	0.03~0.8[0.3~8] (L：0.02~0.42[0.2~4.2])		
最高使用壓力	MPa[kgf/cm²]	1[10] (D：1.4[14])		
周圍溫度範圍	℃	5~50 (D：5~65)		
過濾杯子容量	cm³	22	47	140
給油杯容量	cm³	43	78	240
滴下最少流量	ℓ /min(ANR)	50	50	80
重量	kg	0.48	0.65	1.30
使用推薦油		(ISOVG32)		







組合件

型號	數量	U45	U55	U105	材質
調壓過濾器	1	B45-02, 03	B55-02, 03, 04	B105-04, 06	—
給油器	1	L45-02, 03	L55-02, 03, 04	L105-04, 06	—
連接O型環	1	AS568-017	JASO-1021	AS568-120	NBR
連接螺絲	2	M4×0.7×10	M5×0.8×12	M6×1.0×15	SC

流量特性(上圖)
壓力特性(下圖)

形狀尺寸

(單位：mm)

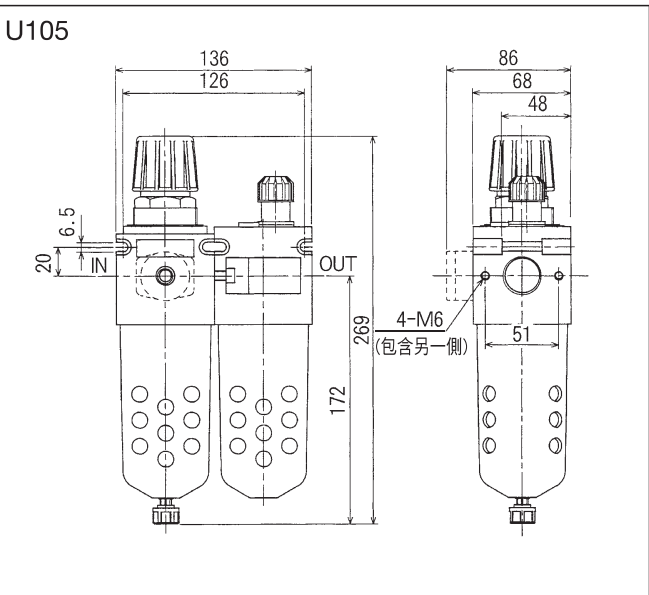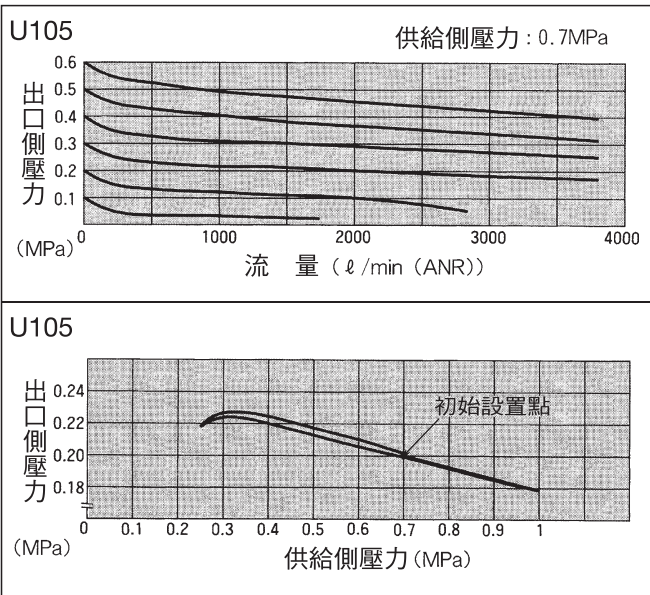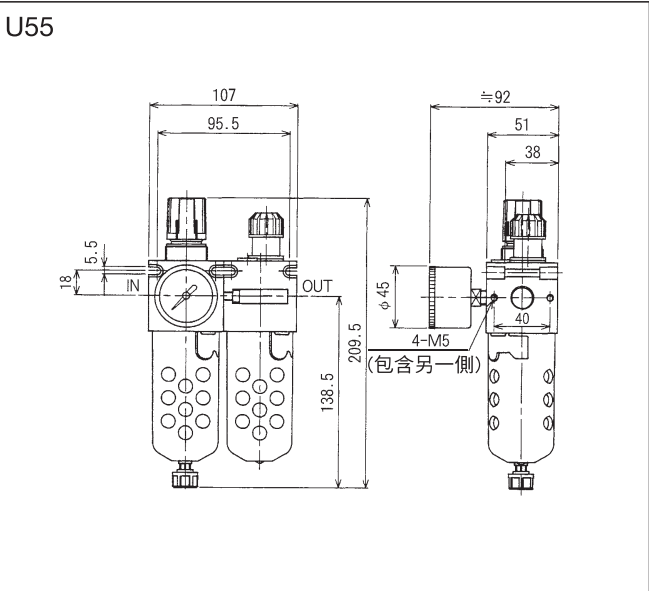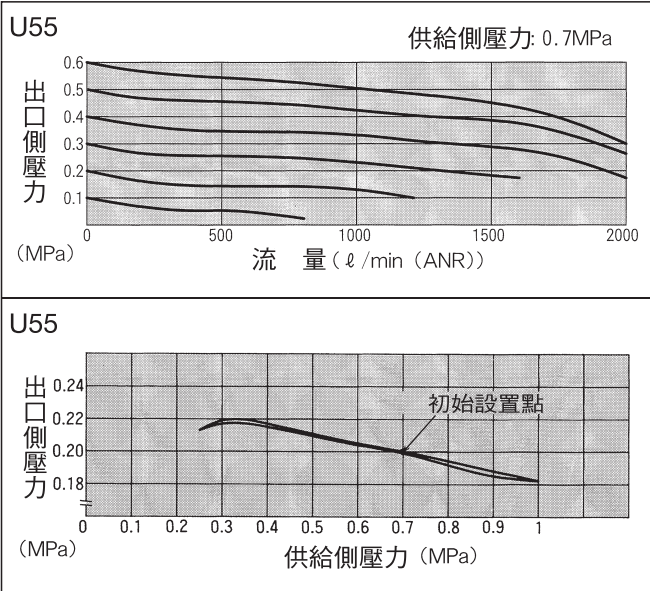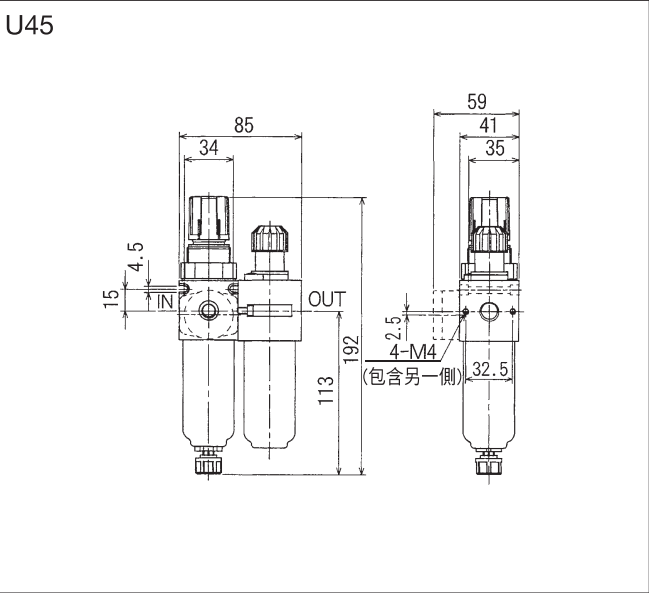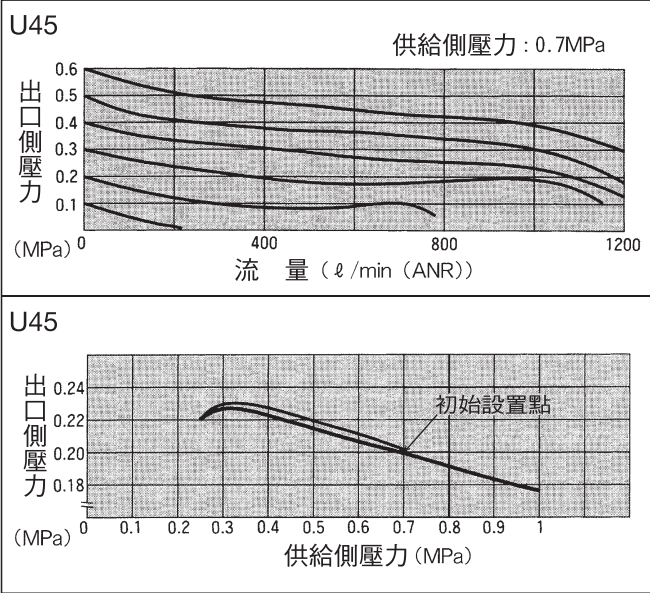

QUBE